

Bluetooth Ver.4.0
class 2

Wireless Headset

LBT-HPC11

Manual

Vo.1

블루투스 4.0 버전
class2

무선 헤드셋

LBT-HPC11

취급설명서

Vo.1

蓝牙版本4.0
等级2

无线耳机

LBT-HPC11

使用说明书

第一册

English

한국어

中文(简体)

Checking the Package Contents

- ☐ Earphones 1
- ☐ Ear pieces (S/M/L)
*Already fitted with M size ear pieces 1 pair each (3 total)
- ☐ USB charger cable 1
- ☐ Manual (this document) 1

Basic Specifications

Device name	LBT-HPC11	Number of Allowable Paired Devices	eight
Bluetooth® Specification	Bluetooth® Ver.4.0	Continuous Standby Time	Max. 120 hours
Carrier Frequency	2.4 GHz band	Music Play Time/ Continuous conversation time	Music: approx. 4.5 hrs. Conversation: approx. 5 hrs.
Transmission Distance	Maximum radius of 10m (in the absence of obstacles) Class 2		
Supported Profiles	HSP (Headset Profile) HFP (Handsfree Profile) A2DP (Advanced Audio Distribution Profile) AVRCP (Audio/Video Remote Control Profile)	Environmental Conditions	In Operation Temperature Relative humidity In Storage Temperature Relative humidity
		Dimensions (W x H x D)	16.3 x 27.0 x 7.0 mm (excluding protrusions)
		Weight	Approx. 12 g

List of Main Operations

	Operations of the Multi-function Button	LED Light Status
Power On	Press and hold for approximately three seconds in the power off state.	Off -> Blinks in blue three times -> Blinks twice rapidly
Power Off	Press and hold for approximately six seconds in the power on state.	Blinks in red three times -> Off
Charging	-	Turns on in red
Fully Charged	-	Turns on in blue
Insufficient Battery Level	-	Blinks in blue every second
Pairing Mode	Press and hold for approximately eight seconds in the power off state.	Blinks in red and blue alternately
Pick up/terminate calls	Press once to pick up/terminate a call	-
Redialing	Click twice in standby mode	-

패키지 구성품 확인

- ☐ 헤드셋 본체 1
- ☐ 이어캡(S/M/L 사이즈) * M 사이즈는 헤드셋 본체에
장착된 상태로 제공 각 1(합계 3)
- ☐ USB 충전 케이블 1
- ☐ 취급설명서(본서) 1

기본 사양

제품명	LBT-HPC11	허용 등록장치 대수	8
블루투스 사양	블루투스 4.0	연속 대기시간	최대 120시간
반송파 주파수	2.4GHz 대역	음악 재생시간/ 연속 통화시간	음악: 약 4.5시간 통화: 약 5시간
전송 거리	최대반경 10m (장애물이 없는 경우) Class2	작동 시 상대습도	온도 5~35℃ 상대습도 20~80%(단, 결로현상이 없는 곳)
지원 프로파일	HSP(헤드셋 프로파일) HFP(핸즈프리 프로파일) A2DP(고급 오디오 비모 프로파일) AVRCP(오디오/비디오 리모컨 프로파일)	보관 시 상대습도	온도 -10℃ ~ +50℃ 상대습도 20~80%
		외형 치수(폭x높이x깊이)	16.3 x 27.0 x 7.0mm(돌출부 제외)
		무게	약 12g

주요 조작 일람표

	다기능 버튼 조작	LED 램프 상태
전원 켜기	전원이 꺼진 상태에서 약 3초간 길게 누름	꺼짐 -> 파란색으로 3회 깜빡임 후, 2회 빠르게 깜빡임
전원 끄기	전원이 켜진 상태에서 약 6초 간 길게 누름	빨간색으로 3회 깜빡임 -> 꺼짐
충전 중	-	빨간색으로 켜짐
충전 완료	-	파란색으로 켜짐
배터리 용량 부족	-	파란색으로 1초 간격으로 깜빡임
등록 모드	전원이 꺼진 상태에서 약 8초 간 길게 누름	빨간색과 파란색으로 번갈아 깜빡임
통화 수신/종료	통화 착신 시/통화 중에 짧게 1회 누름	-
다시 가는 중	대기 모드에서 2회 누름	-

检查包装内容

- ☐ 耳机机身 1只
- ☐ 耳塞 (小/中/大号) * 中号耳塞已安装于耳机机身上 各1对 (共3对)
- ☐ USB充电电线 1条
- ☐ 使用说明书 (本文档) 1份

基本规格


产品型号	LBT-HPC11	可存储的配对设备数	8台
蓝牙规格	蓝牙4.0	连续待机时间	最多120小时
载波频率	2.4千兆赫兹 (GHz) 频段	连续播放音乐时间/ 连续通话时间	音乐: 约4.5小时 通话: 约5小时
传输距离	最大半径为10米 (在无障碍物情况下) 等级2	环境条件	操作时 温度 5~35摄氏度 相对湿度 20~80% (无冷凝时) 存放时 温度 -10至+50摄氏度 相对湿度 20~80%
支持协议	HSP (耳机模式) HFP (免提模式) A2DP (蓝牙音频传输模型协定) AVRCP (音频/视频遥控模型协定)	外形尺寸 (宽 x 高 x 深)	16.3 x 27.0 x 7.0 毫米 (不包括突起部分)
		重量	约12g

主要操作列表

	多功能键的操作	LED灯状态
电源开启	在电源关闭状态下长按约3秒	熄灭 -> 蓝色闪烁3次后快速闪烁2次
电源关闭	在电源开启状态下长按约6秒	红色闪烁3次 -> 熄灭
充电中	-	红色亮灯
充电完成	-	蓝色亮灯
电池电量不足	-	每隔1秒蓝色闪烁
配对模式	在电源关闭状态下长按约8秒	红蓝交替闪烁
接听/挂断电话	在来电时, 通话状态下短按一次	-
重拨	在待机状态下快速连接2次	-


Name and Function of Each Part

★ Multi-function button	To turn the power on/off, pair the headset, and answer/terminate a call as well as to play or pause music.
☆LED light	Lights up in blue or red to indicate the power or pairing status.
▲Microphone	A handsfree microphone
△Ear pieces	Already fitted with the M size ear pieces at the time of purchase. Please try other sizes (S and L) if they do not fit your ears.
◆Charge connector	Connect the included USB charger cable to charge the headset.
◇Volume button(+/-) (previous/next song button)	Press the "+" or "-" volume button to increase or decrease the volume, respectively. To go to the previous/next song, press and hold the "+" or "-" button, respectively for about four seconds while music is being played.

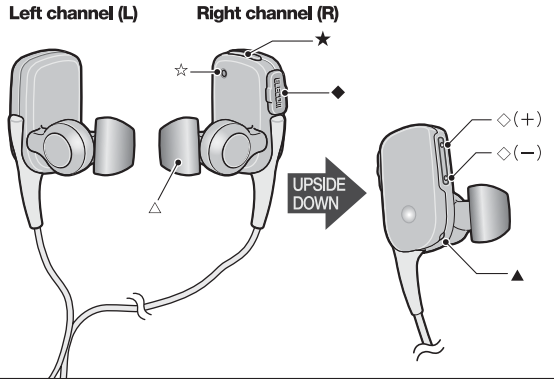


각 부분의 명칭 및 기능

★다기능 버튼	전원 켜기/끄기, 장치 등록, 통화 수신/종료, 음악재생 또는 일시중지 등에 사용하는 버튼
☆LED 램프	전원이나 페어링 상태를 나타내는 빨간색과 파란색의 LED 램프
▲마이크	핸즈프리 통화 시 사용하는 마이크
△이어캡	구매 시 M 사이즈의 이어캡이 장착되어있습니다. M 사이즈가 귀에 맞지 않는 경우, 다른 사이즈(S 또는 L)로 교환해주시십시오.
◆충전 커넥터	부속 USB 충전 케이블을 연결하여 충전
◇볼륨 버튼 (+/-)	볼륨을 높일 때는 +버튼, 줄일 때는 -버튼을 누름. (앞으로/뒤로 검색 버튼) 음악재생 중에 +/-를 길게(4초 정도) 누르면 앞으로 거거나 뒤로감. -버튼을 누르면 뒤로, +버튼을 누르면 앞으로 감.

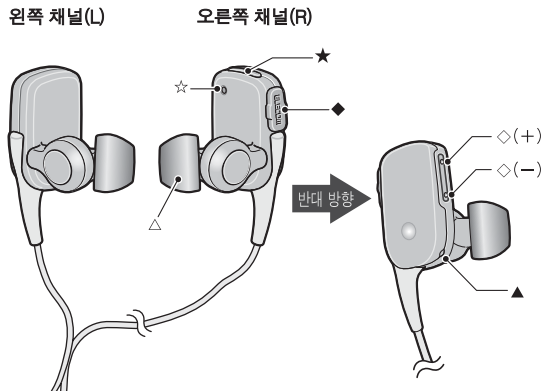

各部分の名称和功能

★多功能键	此键用于开启/关闭电源, 配对, 接听/挂断电话。并用于播放或暂停音乐。
☆LED灯	蓝色/红色LED灯显示电源状态及配对模式。
▲麦克风	麦克风用于免提对话。
△耳塞	中号耳塞在您购买时已安装于耳机。如果大小不适合您的耳朵, 请使用其他尺寸 (小号或大号)。
◆充电接口	将附带的USB充电电线插入接口, 对音频接收器进行充电。
◇音量键(+/-) (快进/倒退)	增大音量时请按“+”键, 减小音量时请按“-”键。播放音乐时长按“+”键约4秒即可快进到下一首, 长按4秒“-”键即可回到上一首。

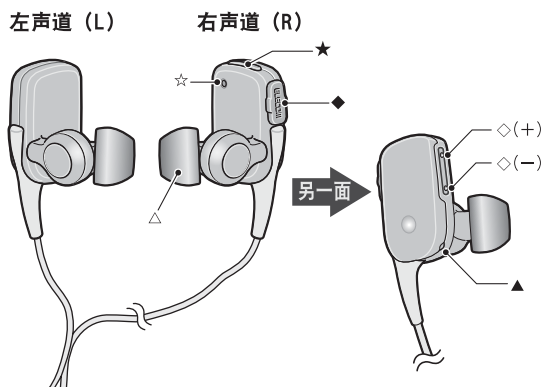

1 Charging the headset


1 Connect the charger cable to the headset.

Once charging starts, the LED light will turn on in red. (A full charge takes approximately two hours)

2 The LED light turns on in blue when charging is complete.

[Connection for Charging the Battery]

Turns on in red when charging.
Turns on in blue when charging is complete.

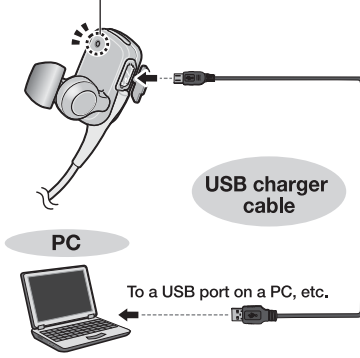

1 충전하기


1 헤드셋에 충전 케이블을 연결하여 충전합니다.

충전이 시작되면 LED 램프가 빨간색으로 켜집니다.
(약 2시간이면 충전이 완료됩니다)

2 충전이 완료되면 LED 램프가 파란색으로 켜집니다.

[충전 시 연결]

충전 중에는 빨간색으로 켜집니다.
충전이 완료되면 파란색으로 켜집니다.

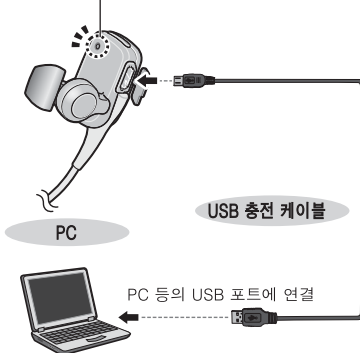

1 充电


1 将充电电线与耳机连接并进行充电。

当开始充电时, 红色LED灯点亮。
(充电时间约2小时)

2 当充电完成时, LED 灯点亮为蓝色。

[进行充电时的连接]

当进行充电时红灯点亮,
充电完成时, 指示灯点亮为蓝色。

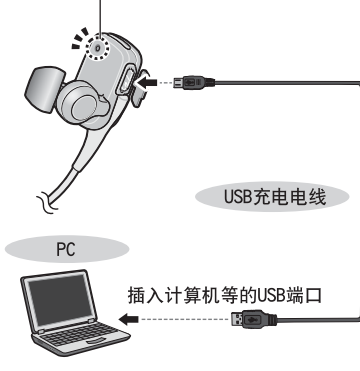

2 Pairing

1 Enable the pairing mode.


Press and hold the multi-function button for at least six seconds while the power is turned off. The LED light blinks in red and blue alternately once the pairing mode is enabled.



No light (Power off) Turns on in blue (Power on) Blinks in red and blue alternately (Pairing Mode)

2 Search for the headset from your cell phone.

The search procedure is different depending on your phone.



Register the headset to your cell phone.

Once the device name of the headset "LBT-HPC11" is displayed on the search screen, select and register the headset. The LED light blinks in blue slowly (once every six seconds) once the pairing is complete.

Required Information for Connection

● DEVICE NAME LBT-HPC11

● PASS CODE 0000 (four zeros)

2 페어링

1 페어링 모드로 전환하기

헤드셋의 "전원이 꺼진 상태"에서 페어링 버튼을 6초 이상 길게 누릅니다.
LED 램프가 빨간색<->파란색으로 번갈아 깜빡이며 페어링 모드로 전환됩니다.


꺼짐 (전원 끄기) 파란색으로 켜짐 (전원 켜기) 빨간색<->파란색 불이 번갈아 깜빡임 (등록 모드)

2 휴대폰에서 헤드셋 검색

휴대폰에서 헤드셋을 검색합니다.
검색방법은 사용하는 기기에 따라 달라집니다.

3 휴대폰에 헤드셋 등록

헤드셋 장치 이름인 "LBT-HPC11"이 검색 화면에 표시되면 선택하여 등록합니다.
페어링이 완료되면 LED 램프가 파란색으로 천천히 (6초에 1회) 깜빡입니다.



연결 시 필요 정보
● 장치 이름 LBT-HPC11
● 비밀번호 0000 (숫자 0이 4개)

3 Connection and Basic Operations

1 Check the Connection

Blinks in blue slowly (once every six seconds).

The pairing process is required again if the LED light blinks two times in six seconds.

Once the product is registered, it will be connected automatically from the next time.

2 Setting is complete (Successfully Connected)

Press and hold the multi-function button for three seconds while the power is turned off. The LED light blinks in blue three times, and then blinks twice rapidly to indicate that the power is turned on. If the Bluetooth function of the connection device is in standby mode, the connection is automatically established again.

2 To turn off the headset:

Press and hold the multi-function button for approx. four seconds while the power is turned on. The LED light turns on in red for one second before turning off, and the power turns off.

Automatic Power Off Function

The headset turns off automatically about five minutes after the transmission from the connected device is terminated (for example when the cell phone is turned off), or when there is no device available for pairing.

[Basic Operations]

■Picking up a Call

Press the multi-function button once when there is a ringtone on the headset.

■Terminating a Call

Press the multi-function button once while the call is in progress.

■Making a Call

Make a call from your cell phone and then redirect the output to your headset.

■Adjusting the Volume

Use the volume button on the headset. If you cannot achieve a desired volume level, adjust the volume on the paired device.

■Going to the Previous/next Song

Press and hold the "+" or "-" button, respectively, for about four seconds while music is being played.

■Listening to Music (A2DP)

This product supports a music streaming function (A2DP). You can listen to music played on your cell phone. If you receive a call while enjoying music or TV, it automatically switches to ringtone. Press the multi-function button to pick up the call. When the call is terminated, it returns to music reproduction.

3 연결과 기본 조작

1 연결을 확인합니다.

파란색으로 천천히 깜빡임 (6초에 1회)

LED 램프가 6초에 2회 깜빡임 경우, 다시 한번 페어링해주시십시오.

2 설정 완료(연결 완료)

한 번 등록하면 이후 자동으로 연결됩니다.

2번째 연결부터는...

1 전원 켜기

전원이 꺼진 상태에서 다기능 버튼을 약 3초간 길게 누르면, LED 램프가 파란색으로 3회 깜빡인 후 2회 빠르게 깜빡이고 전원이 켜집니다. 연결할 기기의 블루투스가 대기 상태이면 자동으로 다시 연결됩니다.

2 전원 끄기

전원이 켜진 상태에서 다기능 버튼을 약 4초간 길게 누르면, LED 램프가 빨간색으로 1초간 깜빡인 후 전원이 꺼집니다.

자동 전원 끄기 기능
휴대폰 전원이 꺼지는 등, 접속 중인 기기로부터 송신이 종료되거나 전원을 껐을 때 등록된 정체가 없는 경우, 약 5분 후에 헤드셋 전원이 자동으로 꺼집니다.

3 连接与基本操作

1 检查连接状态

蓝灯缓慢闪烁 (每隔6秒)

若LED灯每隔6秒钟闪烁2次, 则需要再次进行配对过程。

2 设置完成 (连接成功)

首次配对完成后, 下次将会自动连接。

第二次及以后进行配对连接时...

1 开启电源:

当电源关闭时, 长按多功能按钮3秒。LED灯呈蓝色闪烁3次, 然后快速闪烁2次表示电源开启。如果所连接设备的 Bluetooth处于等待状态, 则自动重新连接。

2 关闭电源:

当电源开启时, 长按多功能按钮约4秒。LED灯呈红色点亮1秒后熄灭, 切断电源。

自动电源关闭功能

在连接设备停止向耳机传输信号 (如手机电源关闭时等), 或在电源开启状态下没有可配对设备的情况下, 耳机将在约5分钟后自动关闭电源。

<基本操作>

■接听电话

听到耳机响起铃声时, 短按多功能键一次。

■挂断电话

在通话状态下, 短按多功能键一次。

■拨打电话

想拨打电话时, 请在您的手机上进行拨号操作, 再切换输出端。

■调节音量

使用本耳机上音量键进行调节。若不能调整到合适音量, 请在配对设备上音量调整。

■快进/倒退

在播放音乐时分别长按“+”和“-”键至少 4 秒。

■听音乐 (A2DP)

本耳机支持音乐连续播放功能 (A2DP), 可以播放手机里的音乐。如果在播放音乐或音频时有电话呼入, 耳机会自动停止音乐并切换至手机铃声。此时, 按多功能键即可接听电话。通话结束后, 音乐自动恢复播放。

