

Power Bank (Qi2, 5000 mAh)

Power Bank Manual (English)

DE-B04-5000BK

ELECOM

Thank you for choosing our product. Please read this manual before use.
Please keep this manual carefully after reading.

How to charge devices such as a smartphone and tablet

When using as a wireless power bank


① Bring the back of the iPhone close to the power bank.
The phone is secured in place with a magnet, and charging starts. If charging does not start automatically, press the power button for approximately one second or less to start charging.
*Some iPhone models are not supported.



Power button

When using as a power bank

① Connect a charging cable to the product.
② Connect the other end of the charging cable to a device such as a smartphone. If charging does not start automatically, press the power button for approximately one second or less to start charging.
③ Once charging is completed, disconnect the charging cable for safety in the order of ② and ① in the figure.

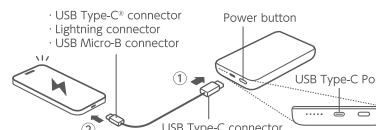

*The product may not charge up to the value indicated on the package or website if the connected device is powered on or used in parallel with other devices during charging.
*Leaving the cable connected will consume the battery. Be sure to disconnect it when not using the product.
*No AC charger or charging cable is included. Please purchase or prepare one separately.
*Do not connect a smartphone, tablet, or other devices equipped with USB Type-C port supporting input and output to the USB Type-C port of the product.
Reverse charging may occur.


Using wireless charging simultaneously with the USB Type-C port

When using wireless charging and USB Type-C port charging simultaneously, the product automatically distributes the total maximum output of 15 W to each device being charged.

*Using wireless charging and USB Type-C port charging simultaneously will take longer than charging with just one of these methods.
*If charging does not start automatically, press the power button for approximately one second or less to start charging.

How to charge a power bank

① Connect a charging cable to the USB Type-C port of the product.
② Connect the other end of the charging cable to an AC charger.
③ Charging starts when you connect the AC charger to a household outlet.
④ Once charging is completed, disconnect the cable for safety in the order of ③, ② and ① in the figure.
*Be sure to disconnect the cable after charging is completed. Leaving it connected may lead to damage of the connector part.
*The LED indicators on the product blink indicating the remaining battery during charging.
*The LED is fully charged when the LED indicators are all lit or all not lit up.
*No AC charger or charging cable is included. Please purchase or prepare one separately.
*1. An AC charger of 18 W or higher is recommended. Charging with an AC charger of less than 18 W may take longer or may not be possible.
Also, charging with a USB Type-C - USB-A cable may not fully charge the battery within the time indicated on the package or website.

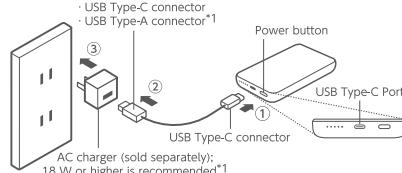


*1. USB Type-C connector
*2. USB Type-A connector
3. AC charger (sold separately); 18 W or higher is recommended

Charging all at once

① Connect a charging cable to the USB Type-C port of the product.
② Connect the other end of the charging cable to an AC charger.
③ Connect the AC charger to a household outlet.
④ Bring the back of the iPhone close to the power bank.

The phone is secured in place with a magnet, and charging starts. If charging does not start automatically, press the power button for approximately one second or less to start charging.

*This product supports pass-through charging, which enables direct charging from the charger to connected devices such as smartphones without using the battery.
*Some iPhone models are not supported.

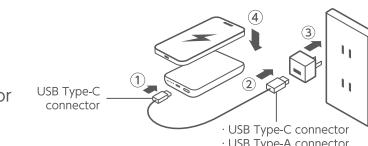


*1. USB Type-C connector
*2. USB Type-C connector
*3. USB Type-A connector

How to check the remaining battery

To check the remaining battery

Press the power button for approximately one second or less. The white LEDs 2 to 5 lights up according to the remaining battery.


*Only LED 2 blinks if the remaining battery of the product is 5% or less.

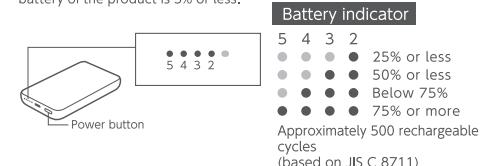

Wireless charging

LED 1 lights up or blinks depending on the usage status of the wireless charging.

Green lighting ... Wireless charging
Green blinking ... Error



Precautions for wireless charging

WARNING

● Do not place any object on the product other than compatible devices. Especially, metallic objects may generate heat and result in burns or fire.
● Make sure that there is nothing between this product and a smartphone or other devices to charge. (Especially be careful of any metal.) Otherwise overheating may occur and lead to a fire. Remove the case or smartphone ring holder if it contains metal, and remove any foreign objects before charging.
● This product is a wireless charger that uses electromagnetic induction technology. If you are using a pacemaker, consult a doctor before using the product.

● Magnets are used in this product. Keep magnetic cards (credit cards, cash cards, or the like) away from it. Note that we have no responsibility for any data corruption of cards due to the magnets. ● Please place the product on a flat surface when using it. ● It may take a while before charging starts after a device has been placed. Wait for about 10 seconds. ● Be sure to hold this product when removing it from a smartphone. Failure to do so may cause a malfunction. ● Fixing with a magnet is only for MagSafe compatible models. Please use it with the case removed, or with a MagSafe compatible case attached. ● Make sure that there is nothing between this product and a smartphone or other devices to charge. (Especially be careful of any metal.) Otherwise overheating may occur and lead to a fire. Remove the case or smartphone ring holder if it contains metal, and remove any foreign objects before charging. ● Charging a smartphone or other device with a case or the like attached may result in poor charging efficiency or failure to charge. In that case, remove the case and charge the smartphone with nothing on the back. ● Depending on the case you use, such as a leather case, there may be marks left on the case as if it were embossed. This is normal, but if it bothers you, remove the case before charging. ● When using a magnetic accessory, such as a leather wallet, attached to the back of the iPhone, remove it before charging. ● When you place your iPhone on this product and connect it to a power source via USB or similar at the same time, charging from the connector will generally take priority. Please check the manual for your iPhone device. ● Note that we have no responsibility for any accidents, damage or malfunction of the device itself, data corruption, or data loss caused by using this product.

CAUTION

● When placing a smartphone or other devices on this product, be sure to follow the precautions for the smartphone and so on.
● Remove any transportation cards or magnetic cards inserted into the cover before use. The cards may heat up or become unusable.

Regarding the built-in battery

*The battery is a consumable that degrades even when used normally. Battery degradation is normal. It is not a malfunction. The batteries cannot be replaced. *When this product is stored without being used for a long period of time, charge it once every 3 to 6 months until 3 battery level LED indicators light up to prevent the degradation of battery performance. *In an environment with a lower ambient temperature, the duration for continuous usage will be shortened.

Regarding disposal

*Follow local regulations when disposing of this product. Enquire about the regulations with your local government. *This product uses a lithium-ion battery (Li-ion).

Limitation of Liability

*In no event will ELECOM Co., Ltd be liable for any lost profits or special, consequential, indirect, punitive damages arising out of the use of this product.
*ELECOM Co., Ltd will have no liability for any loss of data, damages, or any other problems that may occur to any devices connected to this product.

Precautions

Regarding pictograms The instructions in this manual and labels on this product use various pictograms to ensure the safe and correct use of this product and to prevent harm to you and other people as well as damage to property. These icons and their definitions are as follows. Please fully understand them before reading the main text.

 WARNING Ignoring these precautions may lead to inappropriate handling that may cause death or serious injuries.					
 CAUTION Ignoring these precautions may lead to inappropriate handling that may cause serious injuries or property damage.					
 General prohibitions	 General precautions	 Unplug	 Do not touch with wet hands	 Do not disassemble	 Avoid dust

Be sure to observe the following precautions in order to ensure safe use.

WARNING

-  ● Stop using the product immediately in the cases listed below and consult the store you purchased it from. A fire or electric shock may result from continued usage.
 - Smoke, abnormal odors, or noises are coming from the product.
 - The product is wet.
 - Foreign materials or liquid has entered the product.
 - The cable, power plug, or case has been damaged.
-  ● Do not touch the power plug or cable with wet hands. Doing so may cause a fire or electric shock.
-  ● Firmly push the power plug all the way into a household outlet. A loose connection may cause a contact failure, leading to a fire or electric shock.
-  ● Do not forcibly pull or bend the cable, and do not place any heavy objects on it. Always hold the connector when plugging and unplugging the cable. Failure to do so may cause external cord damage or disconnection, leading to a fire or electric shock.
-  ● Do not use a power strip for power source. Doing so may cause a fire.
-  ● Do not attempt to disassemble or modify the product. Doing so may cause a fire, electric shock or injury.
-  ● Do not put this product in fire. This may cause an explosion or breakage.

CAUTION

-  ● Before using this product, check that there is no foreign matter such as dust or liquid in the connectors of the product and the connected device. Especially for a waterproof device, check for remaining water when connecting it after it gets wet. Charging when the connector is wet or has foreign matter in it may cause a fire, electric shock, or malfunction.
-  ● When connecting a device to the product, make sure to follow the precautions for that device.
-  ● Do not use or store the product in the following places. Doing so may cause a fire, electric shock, or malfunction.
 - Places exposed to direct sunlight and locations with high temperatures, such as near a space heater.
 - Places with high humidity or close to sources of water.
 - Places with a lot of dust.
 - Places with a lot of vibration.
-  ● Do not use an incompatible charging cable. Doing so may cause a fire, melting, or malfunction.
-  ● Do not use or store near dusty places, such as bedding. Doing so may cause a fire or malfunction.
-  ● Stop using this product immediately if you notice damage, such as cracks, deformation or deterioration.
-  ● Do not use alcohol or other chemicals on this product.
-  ● The product is not waterproof. Use and store it in places where it is not exposed to water or other liquids. Any liquid such as rain, water spray, juice, coffee, steam, and sweat may cause this product to breakdown.
-  ● Do not drop the product, subject it to strong shocks, or place objects on it.
-  ● Please keep out of reach of children.
-  ● Please note that we accept no responsibility whatsoever for any damage to the device used with this product, or any destruction or loss of data incurred, resulting from your use of this product.
-  ● A slight temperature rise of the product during charging may occur and that is normal.
-  ● Remove any transportation cards or magnetic cards inserted into the cover before use. The cards may heat up or become unusable.

Compliance Status

www.elecom.co.jp/global/certification/

Compliant model: DE-B04-5000BK



Complies with
IMDA standards
DA106058.



CIDF25000014

Global Support



https://www.elecom.co.jp/r/s536

ELECOM CO., LTD.

Fushimimachi 4-1-1, Chuo-ku, Osaka City
www.elecom.co.jp/global/

*The actual output value may vary depending on conditions such as the connected device and its OS version. In certain cases, the charging time may be longer or the device may not charge.

*The images are for illustration purposes only and may differ from your actual product.

*In order to make improvements to this product and for improved safety, the colors and specifications are subject to change without prior notice.

*The company and product names on the packaging and the manual are, in general, trademarks or registered trademarks of their respective companies.


*iPhone, iPad, MagSafe are trademarks of Apple Inc., registered in the U.S. and other countries and regions.

*Nintendo Switch and Nintendo Switch Lite are registered trademarks of Nintendo.

*Qi2 and the Qi2 logo are trademarks of the Wireless Power Consortium.

*USB Type-C® and USB-C® are trademarks of USB Implementers Forum.

Power Bank
Manual, Safety precautions and Compliance with regulations, 1st edition, October, 2025



移动电源 (Qi2, 5000 mAh)

移动电源使用说明书 (中文·简体)

DE-B04-5000BK

ELECOM

感谢您选择本产品。请在使用前阅读本使用说明书。
阅读后请妥善保管本使用说明书。

如何为智能手机和平板电脑等设备充电

当用作无线移动电源时

- 将iPhone背面靠近移动电源。
手机通过磁力吸附固定到位，随即开始充电。如果未自动开始充电，请按电源键约1秒或更短时间以开始充电。

*部分iPhone机型不支持（此功能）。



当用作移动电源时

- 将充电线连接至本产品。
- 将充电线的另一端连接至智能手机等设备。如果未自动开始充电，请按电源键约1秒或更短时间以开始充电。
- 充电完成后，为了安全请按照图中②和①的顺序断开充电线。



*如果在充电过程中，所连接的设备处于开机状态，或与其他设备同时使用，则本产品的实际剩余电量可能无法达到包装或官网上标示的数据。
*长期连接充电线会消耗电池电量。
*未附带交流电源适配器或充电线。请另行购买或准备。
*请勿将带有输入输出的USB Type-C端口的智能手机、平板电脑或其他设备连接到本产品的USB Type-C端口。
*可能会发生反向充电。

同时使用无线充电与 USB Type-C端口进行充电


当同时使用无线充电和USB Type-C端口充电时，本产品会自动将总最大输出15 W分配给每个正在充电的设备。

*同时使用无线充电和USB Type-C端口充电所需时间会比仅使用其中一种方式充电更长。
*如果未自动开始充电，请按电源键约1秒或更短时间以开始充电。

如何为移动电源充电

- 将充电线连接至本产品的USB Type-C端口。
- 将充电线的另一端连接至交流电源适配器。
- 当交流电源适配器连接至家用插座时开始充电。
- 充电完成后，为了安全请按照图中③、②和①的顺序断开充电线。

*充电完成后请务必断开充电线。连接状态下可能导致连接器部分损坏。
*本产品的LED指示灯在充电过程中会闪烁以显示剩余电量。
*当所有LED指示灯全部点亮时，本产品已充满电。
*未附带交流电源适配器或充电线。请另行购买或准备。
*1. 建议使用18 W或更高功率的交流电源适配器。使用低于18 W的交流电源适配器充电可能耗时更长或无法充电。
此外，使用USB Type-C转USB-A数据线充电可能无法在包装或网站标示的时间内充满电池。

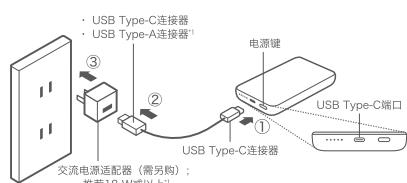


同时充电

- 将充电线连接至本产品的USB Type-C端口。

- 将充电线的另一端连接至交流电源适配器。
- 将交流电源适配器连接至家用插座。
- 将iPhone背面靠近移动电源。

- 手机通过磁力吸附固定到位，随即开始充电。
如果未自动开始充电，请按电源键约1秒或更短时间以开始充电。

*本产品支持直通充电，可在不使用电池的情况下直接通过充电器为智能手机等连接设备供电。
*部分iPhone机型不支持（此功能）。

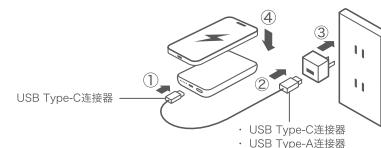


如何检查剩余电量

无线充电

根据无线充电功能的使用状态，LED 1会常亮或闪烁。

绿色常亮	… 无线充电中
绿色闪烁	… 错误

*如发生错误，请抬起iPhone，待iPhone错误消除后重新调整位置。



无线充电注意事项

警告

- 请勿在本产品上放置除兼容设备以外的任何物品。尤其需要注意，金属物体可能因感应发热导致灼伤或引发火灾。
- 请确保本产品与智能手机或其他需充电设备之间没有任何物品。（尤其要注意金属物品。）否则可能会过热并引发火灾。如果手机保护壳或指环支架含有金属材质，请先将其取下，并在充电前确保清除所有异物。
- 本产品是一款采用电磁感应技术的无线充电器。如您使用心脏起搏器，请在使用本产品前咨询医生。

注意事项

- 将智能手机或其他设备放在本产品上时，请务必遵循智能手机等设备的注意事项。
- 使用前请取出插在保护套内的交通卡或磁卡。卡片可能发热，甚至无法使用。

关于内置电池

*电池为消耗品，即使正常使用也会老化。电池老化属于正常现象，这不是故障。电池不可更换。*若本产品长期闲置不用，请每隔3至6个月充电一次，直至3个LED电量指示灯亮起，以防止电池性能下降。*在环境温度较低的情况下，产品的持续使用时间将会缩短。

关于废弃处理

*请按照当地法规处理本产品。请向当地政府咨询相关法规。*本产品使用锂离子电池（Li-ion）。

责任限制

- ELECOM Co., Ltd. 对因使用本产品造成的特殊损失、结构性损失、间接损失、惩罚性损失或所损失利益的赔偿均不承担任何责任。
- ELECOM Co., Ltd. 不对连接到本产品的设备中可能产生的数据丢失、出错或其他问题做出任何担保。

注意事项

关于图标说明 本使用说明书及本产品标签使用了多种图标，以确保安全正确使用本产品，防止对您及他人造成伤害以及财产损失。这些图标及其定义如下。请在阅读正文前充分理解。

⚠ 警告 忽视这些注意事项可能导致不当操作，造成死亡或严重伤害。

⚠ 注意事项 忽视这些注意事项可能导致不当操作，造成严重伤害或财产损失。

🚫 一般禁令

❗ 一般注意事项

🔌 拔掉

🚫 请勿用湿手触摸

🚫 请勿拆卸

🚫 防尘

请务必遵守以下注意事项以确保安全使用。

⚠ 警告

🚫 如出现以下情况请立即停止使用本产品，并咨询购买店铺。继续使用可能导致火灾或触电。

- 本产品出现烟雾、异常气味或噪音。
- 本产品已受潮。
- 有异物或液体进入本产品内部。
- 充电线、电源插头或外壳已损坏。

🚫 请勿用湿手触摸电源插头或充电线。否则可能会导致火灾或触电。

🚫 请将电源插头牢固插入家用插座。连接不牢可能导致接触不良，引发火灾或触电。

🚫 请勿强拉或弯折充电线，也不要在其上放置重物。插拔充电线时请务必握住连接器。否则可能导致外部线缆损坏或断裂，引发火灾或触电。

🚫 请勿使用插线板作为电源。否则可能会引发火灾。

🚫 请勿拆解或改装本产品。否则可能会导致火灾、触电或受伤。

🚫 请勿将本产品投入火中。否则可能会导致爆炸或破裂。

⚠ 注意事项

🚫 请勿使用本产品前，检查本产品及连接设备的连接器内无灰尘、液体等异物。防水设备在淋湿或受潮后，连接前应确保接口处无水分残留。连接器潮湿或有异物时充电可能导致火灾、触电或故障。

❗ 请将设备连接至本产品时，请遵循该设备的注意事项。

🚫 请勿在以下场所使用或存放本产品。否则可能会导致火灾、触电或故障。

- 阳光直射处或高温场所（如取暖器附近）。
- 高湿度或靠近水源的地方。
- 灰尘较多的地方。
- 振动较大的地方。

🚫 请勿使用不兼容的充电线。否则可能会导致火灾、熔化或故障。

🚫 请勿在灰尘较多的地方（如床褥附近）使用或存放本产品。否则可能会导致火灾或故障。

🚫 如发现本产品有裂纹、变形或老化等损坏，请立即停止使用。

🚫 请勿使用酒精或其他化学品清洁本产品。

❗ 本产品不防水。使用及储存场所应避免接触水或其他液体。任何液体如雨水、水雾、果汁、咖啡、蒸汽和汗液都可能导致本产品故障。

🚫 请勿摔落本产品、施加强烈冲击或在其上放置物品。

🚫 请放在儿童无法触及的地方。

🚫 请注意，因使用本产品导致的设备损坏或数据毁坏、丢失，本公司概不负责。

🚫 充电过程中本产品温度略有升高属正常现象。

🚫 使用前请取出插在保护套内的交通卡或磁卡。卡片可能发热，甚至无法使用。

🚫 顾客若使用电源适配器供电，应购买配套使用满足相应安全标准要求并获得CCC认证的电源适配器。

合规状态

www.elecom.co.jp/global/certification/

合规型号：DE-B04-5000BK



Complies with
IMDA standards
DA106058.



CIDF25000014

全球支持



<https://www.elecom.co.jp/r/s536>

ELECOM CO., LTD.

Fushimimachi 4-1-1, Chuo-ku, Osaka City
www.elecom.co.jp/global/

在日本境外购买产品的客户应与当地的零售商联系进行咨询。“ELECOM CO., LTD. (日本)”不对日本之外的其他国家的客户提供有关购买或使用的咨询服务。另外，公司不提供日语之外的其他外语服务。产品如需更换，需要在 ELECOM 保修期规定范围之内。

*实际输出值可能因连接设备及其操作系统版本等条件而有所不同。在某些情况下，充电时间可能较长或设备无法充电。

*图片仅用于说明目的，可能与您的实际产品有所差异。

*为了改进本产品并提高其安全性，本产品的颜色和规格如有更改，恕不另行通知。

*iPhone, iPad, MagSafe are trademarks of Apple Inc, registered in the U.S. and other countries and regions.

*Nintendo Switch and Nintendo Switch Lite are registered trademarks of Nintendo.

*Qi2 and the Qi2 logo are trademarks of the Wireless Power Consortium.

*USB Type-C® and USB-C® are trademarks of USB Implementers Forum.

移动电源

手册、安全注意事项与合规
2025年10月 第1版