

Skype アドレス帳
BT-MG1

クイックセットアップガイド

■はじめに

このたびはこのたびは Skype アドレス帳 BT-MG1 をお買い上げいただき誠にありがとうございます。
本クイックセットアップガイドは、本製品をすぐにお使いいただくための基本的なセットアップについて説明しています。
ソフトウェアの詳細な機能については、当社のホームページで公開されているソフトウェアユーザーズガイドをご参照ください。

■パッケージ内容の確認

パッケージには次のものが含まれます。

- ・BT-MG1 1 個
- ・クイックセットアップガイド(本書) 1 冊
- ・Skype 使いかたガイド..... 1 冊

■安全にご使用いただくために

- 本製品の取り付け、取りはずしのときには、必ずコンピュータの本体および周辺機器メーカーの注意事項に従ってください。
- 本製品の分解、改造、修理をご自分でおこなわないでください。
火災や感電、故障の原因になります。また、故障時の保証の対象外となります。
- 本製品および本製品を取り付けたコンピュータ本体を、水を使う場所や湿気の多いところで使用しないでください。
火災や感電、故障の原因になります。
- 本製品の取り付け、取りはずしのときには、本製品に触れる前に金属製のもの(スチールデスク、ドアのノブなど)に手を触れて、静電気を除去してから作業をおこなってください。静電気は本製品の破損の原因になります。
- お客様ご自身の分解、修理、改造は絶対にしないでください。
- 異常を感じた場合はすぐに使用を中止し、お買い上げの販売店、もしくは当社総合インフォメーションセンターにご相談ください。

■ご使用にあたって

- 本製品の取り付け、取りはずしのときには、必ずコンピュータの本体および周辺機器メーカーの注意事項に従ってください。
- 本製品およびソフトウェアを使用したことによって生じた動作障害やデータの喪失などの損害に対しては、当社は一切の責任を負いかねます。
- 本製品は、USB ハブなどを通さずパソコンに直接接続してご使用ください。また、接続する場所を変えず決まった USB ポートでご使用ください。
- 本製品を湿気やホコリの多いところで使用しないでください。
- 本製品に強い衝撃を与えないでください。
- お手入れの際には乾いたやわらかい布で軽く拭いてください。ベンジン、シンナー、アルコールなどは使用しないでください。

1 インストールする前に

		USB 端子	Skype LED
名称	機能		
Skype LED	本製品がパソコンに接続され、使用できる状態の場合に点灯します。Skype プログラムが動作しデータの転送中は速く点滅します。		
USB 端子	パソコンに USB ポートに接続します。		

■ Skype はあらかじめ使用できる状態にしてください


本製品は、お使いの VoIP ソフトである Skype のコンタクトリストなどの Skype プロファイルデータを本製品へコピーします。本製品をインストールする前に、Skype をインストールして、マイアカウントを取得して、Skype を使用できる状態にしてください。

- 本製品をインストールする前に、Skype をインストールして使用できる状態にしてください。
- インストール後、パソコン側に保存されている Skype プロファイルデータを本製品へ保存したり、本製品に保存されている Skype プロファイルデータをパソコン側へバックアップすることも可能です。詳しくは当社のホームページで公開されているソフトウェアユーザーズガイドをご参照ください。

2 インストールする


- Administrator の権限を持つユーザーでログインしてください。

1 本体裏面から USB 端子部を取り出します。(2-1)




2-1

- 2 本製品をパソコンの USB ポートに接続します。(2-2)
本製品を自動的に認識し、インストールを開始します。
インストール後、パソコンの再起動を促すメッセージが表示されます。

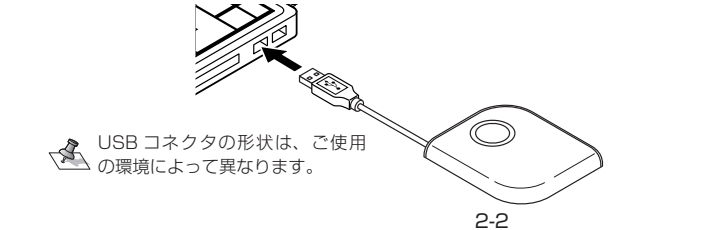

2-2

- 3 はい をクリックします。(2-3)
パソコンが再起動します。
パソコンの再起動後は、タスクトレイに アイコンが表示されます。




2-3

- パソコンの起動途中、スキャンディスクの画面が表示される場合があります。このときは、スキャンディスクが自動的に終了するまでお待ちください。

- 4 「2 インストールする」に従って手順をすすめると、再起動後本製品のセットアップ画面が表示されます。

- お使いのパソコンの CD-ROM オートラン機能がオフになっている場合は、セットアップ画面が表示されないことがあります。当社のホームページで公開されているソフトウェアユーザーズガイドに記載している「こまだったときは」をご参照ください。

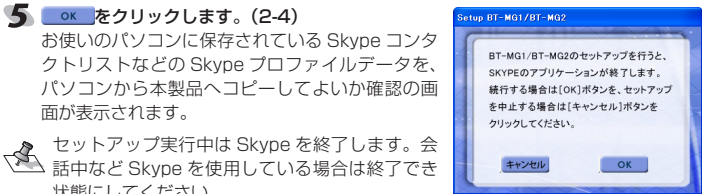

2-4

- 6 Skype プロファイルデータをパソコンから本製品へコピーしてよい場合は、次へ をクリックします。(2-5)
セキュリティコード入力画面が表示されます。

- データのコピーが必要ないときは、スキップ をクリックします。



2-5

- 7 本製品のセキュリティコードを入力し、次へ をクリックします。(2-6)
本製品のセキュリティコードは、出荷時は 0000 に設定されています。
Skype アカウントの入力画面が表示されます。

- セキュリティ向上のため、本製品のセキュリティコードを変更できます。変更については、当社のホームページで公開されているソフトウェアユーザーズガイドをご覧ください。

- 8 取得済みの Skype アカウントを入力し、次へ をクリックします。(2-7)
パソコンから本製品へコピーを実行してよいか確認の画面が表示されます。



2-6

- 9 パソコンから本製品へ Skype プロファイルデータをコピーしてよい場合は、次へ をクリックします。(2-8)
次へ をクリックするとコピーを開始します。



2-7

- 10 コピーが完了すると、セットアップが完了した旨の画面が表示されます。OK をクリックします。(2-9)
Skype のログイン画面が表示されます。

- 手順 4 から 10 までの操作は、セットアップ後タスクトレイに表示される本製品のアイコンから「BT-MG1/2 のセットアップ」を選択すると、何度でもやり直しが可能です。




2-8



2-9

- 11 あらかじめ登録していた Skype ネームとパスワードを入力して、次へ をクリックします。(2-10)
スカイプにログインします。

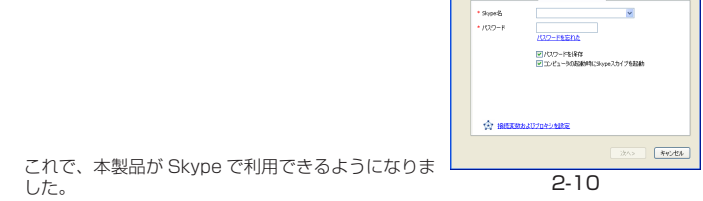

2-10

3 BT-MG1 を使用するには

本製品のインストール後は、本製品を取り付けるだけで使用できます。

- BT-MG1 を使って Skype を利用するには
本製品をパソコンの USB ポートに接続します。
本製品を接続すると、タスクトレイに アイコンが表示されます。また、同時に Skype も自動的に起動します。

- アイコンがタスクトレイに表示されるまで、パソコンの処理速度にもよりますが 1 分程度時間がかかることがあります。
・Skype の使用方法については、本製品同梱の「Skype 使いかたガイド」を参照してください。

- BT-MG1 を取り外すには
BT-MG1 を取り外すと Skype も自動的に終了してしまいます。取り外すときは音声チャットを終了するなど、Skype を終了できる状態にしてください。

- 1 タスクトレイにある アイコンを左クリックし、「中止」を選択します。(3-1)
アイコンの表示が消えます。
Skype が自動的に終了します。



3-1

- 2 タスクトレイにある アイコンを右クリックし、「USB 大容量記憶デバイス ドライブ (x:x) を安全に取り外します」を選択します。(3-2)
USB 大容量記憶装置(デバイス ドライブ H:) を安全に取り外します

3-2

- ドライブは 2 つ表示されます。またドライブ番号はお使いのパソコン環境により変わります。

- 3 本製品をパソコンの USB ポートから取り外します。

当社のホームページ(<http://www.elecom.co.jp>)には、ここで紹介したセットアップの手順以外について詳しく説明したソフトウェアユーザーズガイドをご用意しています。ぜひお読みください。

■仕様

外形寸法	約幅 56.0 ×高さ 10.0 ×奥行 70.0mm
質量	約 30g
電源	USB DC5V
動作環境	USB1.1 または USB2.0 のポートを標準装備した PC/AT 互換機
対応 OS	Windows®2000/XP
動作温度	5℃～40℃ (結露なきこと)
フラッシュメモリ総容量	32MB
インターフェイス	USB

※記載された会社名、商標及びロゴは各社の商標または登録商標です。

■ユーザーサポートと製品の保証

何らかのトラブルが発生した場合や、操作方法がわからない場合などは、マニュアル、ホームページの FAQ などをご確認ください。
ELECOM ホームページ <http://www.elecom.co.jp/>

それでも解決しない場合は、「エレコム総合インフォメーションセンター」までお問い合わせください。

商品に関するお問い合わせは	エレコム総合インフォメーションセンター TEL.0570-084-465 FAX.0570-050-012 受付時間 9:00～12:00、13:00～18:00 年中無休
---------------	--

(ENGLISH)

■Preface

Thank you for purchasing the BT-MG1 Skype Address Book.
This Quick Setup Guide explains the basics of setting up the BT-MG1 for immediate use.
For detailed features of the software, download the user's guide from our website at www.elecom.co.jp.

■Check the Content of Your Package

The product package contains the following.

- BT-MG1 ... 1
- Quick Setup Guide (This publication) ... 1
- Skype User's Guide ... 1


■For Your Safety

- Observe the manufacturer's instructions and warnings of your computer and peripherals when connecting and disconnecting the BT-MG1.
- Do not disassemble, remodel or service the BT-MG1 yourself.
- Do not use the BT-MG1 or the computer to which it is connected anywhere water is used or which is highly humid.
Exposure to water and high humidity may result in fire, electric shock or equipment failure.
- Before connecting and disconnecting the BT-MG1, touch something metallic (steel desk, door knob, etc.) to discharge any static electricity from your body. Static electricity can damage the BT-MG1.
- Never disassemble, remodel or service the BT-MG1 yourself.
- If you detect something strange or wrong with the BT-MG1, stop use immediately and contact either the place of purchase or ELECOM's Customer Support.

■Precautions in Use

- Observe the manufacturer's instructions and warnings of your computer and peripherals when connecting and disconnecting the BT-MG1.
- ELECOM Co., Ltd. assumes no responsibility whatsoever for any operational failures, lost data or other damages that occur as a result of using the BT-MG1 or software.
- Connect the BT-MG1 directly to a computer without routing the connection through a USB hub. Also, select and use a specific USB port without changing it.
- Do not use the BT-MG1 in highly humid or dusty places.
- Do not subject the BT-MG1 to strong shocks or impacts.
- To clean the BT-MG1, wipe the product with a dry soft piece of cloth. Do not use benzene, thinner, alcohol or similar substances.

1 Before Installation

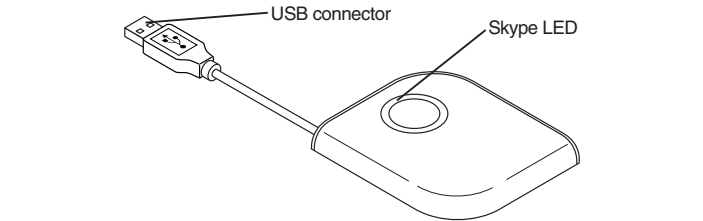

Part	Function
Skype LED	Lights solidly when the BT-MG1 is connected to a computer and is ready to be used. Flashes rapidly while the Skype program is running and transferring data.
USB connector	Connect to a USB port on the computer.

■Enable Skype before installing the BT-MG1.

Copy Skype profile data such as the Skype contact list of the VoIP software you will use into the BT-MG1. Before installing the BT-MG1, install Skype in the computer, create an account and enable Skype.

●Install and enable Skype before installing the BT-MG1.

- After installing Skype in your computer, you can save the Skype profile data from the computer in the BT-MG1 and back up the Skype profile data stored in the BT-MG1. For details, download the user's guide from our website at www.elecom.co.jp.

2 Installation

●Log in with administrator authorization.

- 1 Extend the USB connector from the storage space on the rear of the BT-MG1. (2-1)

- 2 Connect the BT-MG1 to a USB port on your computer. (2-2)
Your computer should automatically detect the BT-MG1 and start the installation process. Once installed, a message appears prompting you to restart the computer.

- The location and configuration of the computer's USB port differ according to computer.

- 3 Click on はい (2-3)
The computer restarts itself. Once the computer restarts, a アイコン appears in the task tray.

- While the computer is restarting, the scan disk message may appear. In such case, wait until disk scanning automatically ends.

- 4 If the procedure in “2. Installation” is followed correctly, the Setup BT-MG1/BT-MG1 window appears after the BT-MG1 has been restarted.

 If the CD-ROM Auto Run feature of your computer is OFF, the setup window may not appear. See the “Troubleshooting” section in the software user's guide available for download at our website at www.elecom.co.jp.

5 Click on  (2-4)
A confirmation message appears asking if it is OK to copy Skype profile data such as the Skype contact list, from your computer to the BT-MG1.

 Skype ends so that you can set up the BT-MG1. If using Skype for conversing, etc., stop all use so that it may be ended.

6 To copy the Skype profile data from the computer to the BT-MG1, click on  (2-5)
A window appears prompting you to input the security code.

 If it is unnecessary to copy the data over, click on .

7 Input the BT-MG1 security code and click on  (2-6)
The security code of the BT-MG1 is set to “0000” when the product is shipped from the factory.
After inputting the security code, a window appears for inputting the Skype account number.

 **To improve security, the security code of the BT-MG1 can be changed by the user. To change the security code, download the software user's guide from our website at www.elecom.co.jp.**

8 Input the acquired Skype account and click on  (2-7)
A confirmation message appears prompting you to copy the Skype profile data from the computer to the BT-MG1.

9 To copy the Skype profile data from the computer to the BT-MG1, click on  (2-8)
Clicking on  starts copying.

10 When copying ends, a message appears notifying you that setup is complete. Click on  (2-9)
The Skype login window appears.

 Steps 4 ~ 10 can be repeatedly as often as you like by clicking on the  icon that appears in the task tray after setting up the BT-MG1, and selecting “BT-MG1/2のセットアップ”.

11 Input the registered Skype name and password, and click on  (2-10)
Your computer logs into Skype.

The BT-MG1 can now be used with Skype.

3 Using the BT-MG1

Once installed, the BT-MG1 can be used by simply connecting it to the computer.

■To Use Skype with the BT-MG1

Connect the BT-MG1 to a USB port on the computer.
Once connected to the computer, the  icon appears in the task tray and, at the same time, Skype starts up automatically.

 •Though this depends on computer processing speed, it may take as much as 1 minute for the  icon to appear in the task tray.
•For instructions on how to use Skype, see the Skype User's Guide that was bundled with the BT-MG1.

■To Disconnect the BT-MG1

When the BT-MG1 is disconnected from the computer, Skype automatically ends. Before disconnecting the BT-MG1, end audio chatting, etc.

1 Left-click on the  icon in the task tray and select [中止]. (3-1)
The  icon disappears and Skype ends automatically.

2 Right-click on the  icon in the task tray and select “USB 大容量記憶デバイス ドライブ (x:x) を安全に取り外します”. (3-2)

 Two drives appear. Moreover, the drive number will vary according to your computer environment.

3 Disconnect the BT-MG1 from the USB port on the computer.

The setup procedures shown here and other more detailed information can be obtained by downloading the user's guide from our website at www.elecom.co.jp.

■ Specifications

Outer dimensions	Approx. W56.0 x H10.0 x D70.0 mm
Weight	Approx. 30 g
Power supply	USB DC5V
Operating environment	PC/AT compatible with USB1.1 or USB2.0 port as standard equipment
Supported OS	Windows®2000/XP
Working temperature	5 - 40°C (non-condensing)
Flash memory capacity	32MB
Interface	USB

*Company names, trademarks and logos appearing in this publication are the trademarks or registered trademarks of their respective owners.

■ Support

ELECOM does not provide user support outside of Japan.
ELECOM does not provide user support for non-Japanese OS.
ELECOM does not respond to inquiries regarding this English manual.

(中文)

■ 前言

非常感謝您購買Skype通訊錄BT-MG1。
本快速設定指南將針對關於如何能立刻使用本產品之基本設定進行解說。
有關於軟體的詳細功能請參考本公司在網頁上公開的使用者軟體指南。

■ 產品包裝內容確認

產品包裝裡面包含下列物品。

- BT-MG1 1個
- 快速設定指南（本書） 1份
- Skype使用方法指南 1份


■ 使用安全注意事項

- 在安裝或是取下本產品時請務必遵循電腦主機以及周邊設備製造商的注意事項。
- 切勿擅自進行分解、改造、修理本產品。
這是導致火災或者觸電、故障的原因。並且是故障保證對象之外。
- 切勿在使用水或者充滿溼氣的場所上使用本產品以及安裝有本產品的電腦主機。
這是導致火災或者觸電、故障的原因。
- 在安裝或是取下本產品時，在碰觸本產品前請將手碰觸金屬製物品（像是鐵桌、門的把手等）來進行去除靜電動作。靜電是導致本產品損壞的原因。
- 請顧客切勿自行進行產品的分解、修理、改造。
- 發覺有異常之場合請立刻停止使用，並與購入店家或者是本公司的綜合諮詢中心進行洽詢。

■ 使用時注意事項

- 在安裝或是取下本產品時請務必遵循電腦主機以及周邊設備製造商的注意事項。
- 對於使用本產品以及軟體所發生之運作障害或者資料流失等的損害，本公司將一概不負其責任。
- 本產品請不要透過USB集線器而請直接將本產品連接到電腦上來進行使用。並且不要改變連接埠請連接到固定的USB連接埠上來進行使用。
- 請勿在充滿溼氣或者是塵埃的場所使用本產品。
- 請勿使本產品受到強烈的衝擊。
- 進行維護時請使用柔軟的乾布輕輕的進行擦拭。請勿使用石油醚、去光液、酒精等。

1 安裝之前

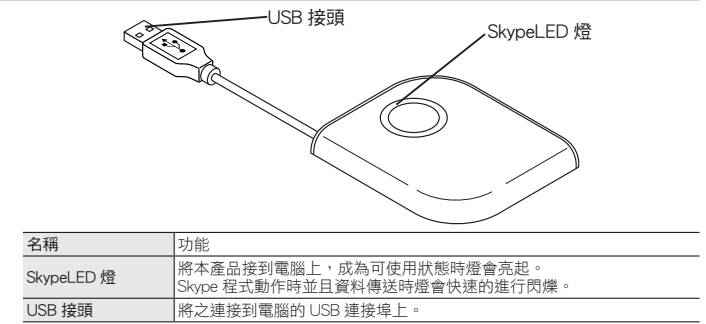

■ 請在事前將 Skype 設為可以使用的狀態

本產品會將所使用的VoIP軟體Skype通訊資料等的Skype的設定資料複製到本產品上。在安裝本產品之前請進行安裝Skype並且取得帳號，使得Skype處於可以使用的狀態。

 在安裝本產前，請進行安裝 Skype 使之處於可以使用的狀態。

 在安裝之後可以將保存在電腦上的 Skype 的設定資料保存到本產品上或者也可以將本產品上所保存著的 Skype 的設定資料備份到電腦上。詳細內容請參考本公司網頁上所公開的使用者軟體指南。

2 進行安裝

 請用具有 Administrator 使用權限的帳戶來登入。

1 將本產品上的 UBS 接頭拉出來。（2-1）

2 將本產品連接到電腦的 USB 埠上。（2-2）
電腦將會自動辨識本產品並開始進行安裝。
安裝後電腦將會顯示重新開機的訊息。

 USB 接頭的形狀會由於所使用的環境的不同而有所差異。

3 按下  按鈕。（2-3）
電腦會進行重新開機。
電腦重新開機後，任務欄上會出現 圖像。
 在電腦開機當中有出現磁碟掃描畫面之場合。在此時請等待磁碟掃描自動結束。

4 依照「2 進行安裝」的操作順序來進行，於重新開機後將會出現本產品的設定畫面。
 所使用的電腦如果有將 CD-ROM 的自動執行功能關閉的話，有可能不會出現設定畫面。
請參考本公司網頁上所公開的使用者軟體指南所記載的「疑難排除」。

5 按下  按鈕。（2-4）
畫面上會顯示出是否將所使用電腦上所保存的 Skype 通訊資料等的 Skype 設定資料複製到本產品上的確認畫面。
 在設定執行時會將 Skype 結束。如果在通話中等情況而在使用 Skype 的場合請使之處於可以結束的狀態。

6 同意將 Skype 設定資料從電腦複製到本產品上時請按下  按鈕。（2-5）
將會出現保全密碼輸入畫面。

 沒有必要複製資料時請按下  按鈕。

7 輸入本產品的保全密碼然後按下  按鈕。（2-6）
本產品的保全密碼在出貨時是設定為 0000。
接著會出現 Skype 帳號的輸入畫面。

 為了將保全性提升，可以進行變更本產品的保全密碼。關於變更方法詳細內容請閱讀本公司網頁上所公開的使用者軟體指南。

8 輸入已經取得的 Skype 帳號資料然後按下  按鈕。（2-7）
畫面上會顯示出是否將從電腦複製到本產品上的確認畫面。

9 要將 Skype 設定資料從電腦複製到本產品上時請按下  按鈕。（2-8）
按下  按鈕的話將會開始進行複製。

10 複製結束後，通知設定完成的畫面將會顯示出來。請按下  按鈕。（2-9）
將會出現 Skype 的登入畫面。

 步驟 4 到 10 的操作於設定結束後將可以從任務欄上所顯示的本產品的圖示上選擇「BT-MG1/2 のセットアップ」的話可以任意重複進行。

11 請輸入事前所登記的 Skype 用戶名稱以及密碼然後按下  按鈕。（2-10）
進行登入到 Skype。

到此為止本產品以可以開始使用Skype。

3 要使用 BT-MG1 時

將本產品進行安裝後，只要將本產品連接上就可以進行使用。

■使用 BT-MG1 來利用 Skype 時

將本產品連接到電腦的 USB 埠上。

將本產品連接上的話會在任務欄上顯示出圖示。此外在此同時 Skype 也會自動的啟動。

 •按照電腦的處理速度的不同在任務欄上顯示出圖示的時間可能會花上 1 分鐘左右。
•有關於 Skype 的使用方法請參考附屬在本產品上的「Skype 使用指南」。

■取下 BT-MG1 時

將BT-MG1取下的話，Skype也會自動結束。請在取下之前將交談等結束掉，使得Skype處於可以結束的狀態。

1 在任務欄的 圖像上按下滑鼠的左鍵，選擇「中止」。（3-1）
 圖像將會消失。
Skype 會自動的結束。

2 在任務欄的 圖像上按下滑鼠的右鍵，選擇「USB 大容量記憶デバイスドライブ (x:x) を安全に取り外します」。（3-2）

 會顯示出兩個磁碟。按照所使用的電腦環境的不同磁碟的號碼會有所不同。

3 將本產品從電腦的 USB 埠上取下。

本公司的網頁 (<http://www.elecom.co.jp>) 上備有比起這裡所介紹的設定步驟更加詳細的使用者軟體指南。敬請閱讀。

■規格

外型尺寸	約 寬度 56.0× 高度 10.0× 長度 70.0mm
重量	約 30g
電源	USB DC5V
運作環境	備有 USB1.1 或是 USB2.0 連接埠的 PC/AT 相容機
相容 OS	Windows®2000/XP
運作溫度	5℃～40℃（無冷凝）
快閃記憶體總容量	32MB
界面	USB

※ 所掲載の会社名稱、商標、標章為各公司所有的商標以及註冊商標。

■ 有關於技術支援

在日本以外使用時恐無法進行技術支援。
使用日文以外的OS無法進行技術支援。
恕無法接受本中文使用手冊的諮詢。

保証書【BT-MG1】			
販売店	店名	住所	TEL
	担当者名	保証期間 6ヶ月	お買い上げ年月日 年 月 日

Skype アドレス帳 BT-MG1
クイックセットアップガイド
発行 エレコム株式会社
2005 年 11 月 9 日 第 1 版

©2005 ELECOM Corporation. All rights reserved.